

OPK



PRODUCTS DIGEST

— Japan Quality —

FOUNDED 1934



OKUDAYA GIKEN CO., LTD.
OSAKA JAPAN

ESTABLISHED 1954

HAND PALLET TRUCK SERIES

Standard Type



CP-15S-107

- Capacity : 1500/2000/2500/3000/3500/5000 kg
- Fork (W) : 470/520/685/700 mm
- Fork (L) : 850/980/1070/1150/1220/1400/1500/1600/1800 mm
- Min. (H) : 80/85/100 mm (STANDARD)
65 mm (LOW PROFILE)
- Max. (H) : 200/205/220 mm (STANDARD)
185 mm (LOW PROFILE)

Ultra Low Profile Type




CPL-10S-107

- Capacity : 1000/1300 kg
- Fork (W) : 450/520/685 mm
- Fork (L) : 850/1000/1070/1220/1400 mm
- Min. (H) : 39/45 mm
- Max. (H) : 114/135 mm




Cold Room Type

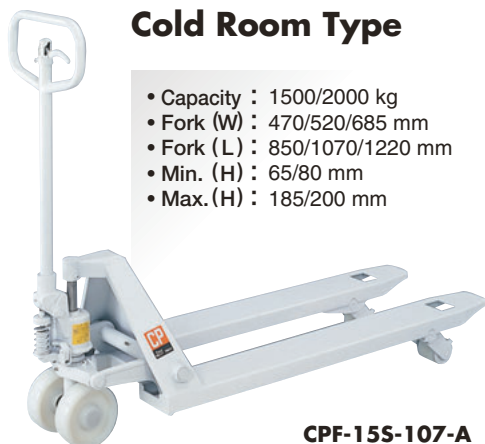

CPF-15S-107-A

- Capacity : 1500/2000 kg
- Fork (W) : 470/520/685 mm
- Fork (L) : 850/1070/1220 mm
- Min. (H) : 65/80 mm
- Max. (H) : 185/200 mm

Traverse Type

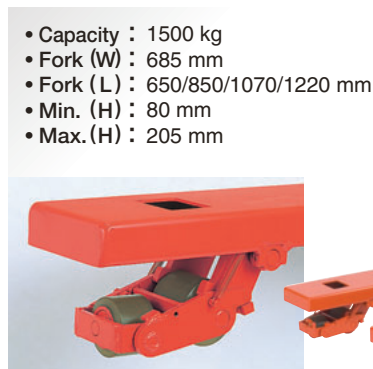

CPW-15L-65

- Capacity : 1500 kg
- Fork (W) : 685 mm
- Fork (L) : 650/850/1070/1220 mm
- Min. (H) : 80 mm
- Max. (H) : 205 mm

HIGH CATCH SERIES

Manual Type



HC-10A-45

- Capacity : 500/1000 kg
- Fork (W) : 520/685 mm
- Fork (L) : 800/930/1070 mm
- Min. (H) : 85 mm
- Max. (H) : 450/700/720 mm

Battery Type



HC-D10A-70

- Capacity : 500/1000 kg
- Fork (W) : 520/685 mm
- Fork (L) : 930/1070 mm
- Min. (H) : 85 mm
- Max. (H) : 700/720 mm

Self-propelled Type



HC-U5A-70

- Capacity : 500 kg
- Fork (W) : 520/685 mm
- Fork (L) : 930 mm
- Min. (H) : 85 mm
- Max. (H) : 720 mm



Antyac SERIES

Self-propelled Battery Pallet Truck Type



- Capacity : 1300/1600
1800/2000 kg
- Fork (W) : 620 mm
- Fork (L) : 1070 mm
- Min. (H) : 80 mm
- Max. (H) : 200 mm

BCP-16J



Anty ac
(DC12V 50AH/5HRx2)

Anty ac PLUS/BPL
(DC12V 90AH/5HRx2)

High Capacity Battery Type



- Capacity : 1300/1600
1800/2000 kg
- Fork (W) : 620 mm
- Fork (L) : 1070 mm
- Min. (H) : 80 mm
- Max. (H) : 200 mm

BCP-20JP

Self-propelled Battery Power Lifter Type



BPL-1000-15

BPL

- Capacity : 990/1500 kg
- Fork (W) : 270~725/230~800 mm
- Fork (L) : 800~1000/1000 mm
- Min. (H) : 80(97)/80(135) mm
- Max. (H) : 1500/1400 mm

BPLW

- Capacity : 650 kg
- Fork (W) : 270~825 mm
- Fork (L) : 800 mm
- Min. (H) : 80(97) mm
- Max. (H) : 2500 mm



SELF-PROPELLED BATTERY PALLET TRUCK



CPSU-16S

- Capacity : 1300/1600 kg
- Fork (W) : 580 mm
- Fork (L) : 1070 mm
- Min. (H) : 80 mm
- Max. (H) : 200 mm

SELF-PROPELLED BATTERY PALLET TRUCK



CPR-10S-A



CPE-10J

- Capacity : 1000 kg
- Fork (W) : 580 mm
- Fork (L) : 1070 mm
- Min. (H) : 80 mm
- Max. (H) : 200 mm

- Capacity : 1000 kg
- Fork (W) : 620 mm
- Fork (L) : 1070 mm
- Min. (H) : 65 mm
- Max. (H) : 185 mm

TOWING TRUCK



DRS-10

- Max. Traction Mass : 1000 kg
- Overall Length : 1030 mm
- Overall Width : 430 mm
- Mounting Hook Height : 255-455 mm

POWER LIFTER SERIES (STANDARD TYPE)



Manual Stacker



PL-H350-15

- Capacity : 350 kg
- Fork (W) : 530 mm
- Fork (L) : 650 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm



PL-H500-15

- Capacity : 500/650 kg
- Fork (W) : 575 mm
- Fork (L) : 650/800 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm



PL-H1000-15

- Capacity : 800/1000 kg
- Fork (W) : 725 mm
- Fork (L) : 800 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm



PL-H1000-15L

- Capacity : 800/1000 kg
- Fork (W) : 725 mm
- Fork (L) : 1000 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm

Battery Stacker



PL-D500-15

- Capacity : 350/500/650 kg
- Fork (W) : 530/575 mm
- Fork (L) : 650/800 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm



PL-D1000-15

- Capacity : 800/1000 kg
- Fork (W) : 725 mm
- Fork (L) : 800/1000 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm



PLW-D650-25

- Capacity : 350/500/650 kg
- Fork (W) : 640/775 mm
- Fork (L) : 650/800 mm
- Min. (H) : 80 mm
- Max. (H) : 2500 mm



PPLW-D200-27

- Capacity : 200 kg
- Table : (W)625×(L)600 mm
- Min. (H) : 470 mm
- Max. (H) : 2730 mm



POWER LIFTER SERIES (SPECIAL LIFTER)

Wide Type



PL-D1000-15J

- Capacity : 200/300/400
800/1000 kg
- Fork (W) : 165~530/270~575/
270~725/280~725 mm
- Fork (L) : 1000 mm
- Min. (H) : 80/85 mm
- Max. (H) : 1500 mm



PL-SU1000-15J

- Capacity : 800/1000 kg
- Fork (W) : 270~725/
280~725 mm
- Fork (L) : 1000 mm
- Min. (H) : 80/85 mm
- Max. (H) : 1500 mm

Jib Crane Type



PL-H500-15G

- Capacity : 80/200 kg
- Fork (W) : 300/700 mm
- Fork (L) : 900/960 mm
- Min. (H) : 640/570 mm
- Max. (H) : 1740/2000 mm

Reach Type



PL-H350-15R

- Max load mass : 350 kg
- Lifting height : 80~1500 mm

SELF-PROPELLED BATTERY POWER LIFTER



PL-U Type



PL-U350-15

- Capacity : 350/500/650 kg
- Fork (W) : 530/575 mm
- Fork (L) : 650/800 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm

PL-S Type



PL-S800-15

- Capacity : 500/650/800/990 kg
- Fork (W) : 725/775 mm
- Fork (L) : 650/800 mm
- Min. (H) : 80 mm
- Max. (H) : 1500/2500 mm

PL-SU Type



PL-SU800-15

- Capacity : 500/650/800/1000/1500 kg
- Fork (W) : 575/725/800 mm
- Fork (L) : 650/800/1000 mm
- Min. (H) : 80 mm
- Max. (H) : 1400/1500 mm

PLW-SU Type



PLW-SU650-25

- Capacity : 400/500/650/800 kg
- Fork (W) : 775/825 mm
- Fork (L) : 650/800/1000 mm
- Min. (H) : 80 mm
- Max. (H) : 2500 mm

SANTO CAR SERIES

Table (Standard) Type



SC-4-12-A

- Capacity : 200/400 kg
- Table : (W)540/600 × (L)600/650 mm
- Min. (H) : 160 mm
- Max. (H) : 800/1150 mm

Table (Low Profile) Type



SC-4-8L-A

- Capacity : 200/400 kg
- Table : (W)540/600 × (L)600/650 mm
- Min. (H) : 95 mm
- Max. (H) : 730/1080 mm



Rubber Wheel Available
(Except 1500mm Lifting Type)

Fork Type



SC-4-8F-A

- Capacity : 200/400 kg
- Fork (W) : 515/570 mm
- Fork (L) : 600/650 mm
- Min. (H) : 80 mm
- Max. (H) : 720/1070 mm

1500mm Lifting Height Type



SC-4-15

- Capacity : 400 kg
- Table : (W)600 × (L)650 mm
- Fork : (W)570 × (L)650 mm
- Min. (H) : 80/95/160 mm
- Max. (H) : 1500/1510/1580 mm



SC-D4-15F

- Capacity : 400 kg
- Table : (W)600 × (L)650 mm
- Fork : (W)570 × (L)650 mm
- Min. (H) : 80/95/160 mm
- Max. (H) : 1500/1510/1580 mm

Battery Type



SC-D4-12-A

- Capacity : 200/400 kg
- Table : (W)540/600 × (L)600/650 mm
- Min. (H) : 160 mm
- Max. (H) : 800/1150/1580 mm

Roll (SR) Type



SC-2-8SR-1

- Capacity : 200 kg
- Roller (W) : 480 mm
- Roller (φ) : 60 mm
- Min. (H) : 200 mm
- Max. (H) : 840/1190 mm

Roll (R) Type



SC-4-8R-1

- Capacity : 200/400 kg
- Roller (W) : 400/550 mm
- Roller (φ) : 55/76 mm
- Min. (H) : 200/245 mm
- Max. (H) : 840/885/1190/1235 mm



LIFT TABLE SERIES (CADDIE)

Manual Type



NEW

LT-H100-6

- Capacity : 100 kg
- Table : (L)550×(W)350 mm
- Min. (H) : 210 mm
- Max. (H) : 600 mm



LT-H150-7 (Foldable)

- Capacity : 150 kg
- Table : (L)700×(W)400 mm
- Min. (H) : 210 mm
- Max. (H) : 740 mm



LT-H250-8

- Capacity : 250 kg
- Table : (L)800×(W)500 mm
- Min. (H) : 245 mm
- Max. (H) : 850 mm



LT-H550-9L

- Capacity : 550 kg
- Table : (L)900×(W)600 mm
- Min. (H) : 330 mm
- Max. (H) : 980 mm

Leveler Type



LT-H800-10

- Capacity : 800 kg
- Table : (L)1000×(W)600 mm
- Min. (H) : 340 mm
- Max. (H) : 1070 mm



LT-WH300-15-A

- Capacity : 300 kg
- Table : (L)900×(W)600 mm
- Min. (H) : 410 mm
- Max. (H) : 1500 mm



LT-B200-7

NEW



Maintain the same load height

- Capacity : 100~200/250~400 kg
- Table : (L)800×(W)500 mm/
(L)900×(W)600 mm
- Min. (H) : 370 mm
- Max. (H) : 770 mm

Battery Type



LT-D550-9L

- Capacity : 550/800 kg
- Table : (L)900/1000×(W)600 mm
- Min. (H) : 330/340 mm
- Max. (H) : 950/1040 mm

Walkie Type



LT-U550-9L

- Capacity : 550/800 kg
- Table : (L)900/1000×(W)600 mm
- Min. (H) : 330/340 mm
- Max. (H) : 950/1040 mm

Low Profile Type



LT-H200L-6

- Capacity : 200/400 kg
- Table : (L)800×(W)500 mm/
(L)900×(W)600 mm
- Min. (H) : 85/87 mm
- Max. (H) : 600 mm

LIFT TABLE SERIES (COTEE)

LT-S Type

Options



LT-S10-0407

- Capacity : 100/250 kg
- Table : (W)400/520 × (L)650/720/850 mm
- Min. (H) : 80/150/200 mm
- Max. (H) : 580/650/1050 mm



LT-S25-0509B
(Bellows-type Cover)

LT-E Type



LT-E100-0813

- Capacity : 200-1000 kg
- Table : (W)460-1000 × (L)650-2000 mm
- Min. (H) : 130-235 mm
- Max. (H) : 530-1510 mm

LT-F Type



LT-F200-0712

- Capacity : 2000/3000kg
- Table : (W)700/1000 × (L)1200/1620/2000 mm
- Min. (H) : 180/205/215/220/270 mm
- Max. (H) : 1000/1120/1135/1465/1520 mm

TILT LIFTER



RL-H50

- Capacity : 500/1000 kg
- Fork (W) : 585 mm
- Fork (L) : 800 mm
- Min. (H) : 90 mm
- Max. (H) : 905/910 mm

DRUM PORTER / DRUM HANDLER



CD-250


- Capacity : 300 kg
- Turn : 180°
- Lifting(H) : 0-1000 mm (135° TURN)
1250 mm (90° TURN)



PL-H300-12DT

- Capacity : 250 kg
- Lifting(H) : 330 mm

SANTO PICKER



SCP-D5-21

- Capacity : Table: 50 kg
Passenger: 100 kg
- Table : (W)550 × (L)500 mm
- Min. (H) : 970 mm
- Max. (H) : 2100 mm

STAINLESS STEEL SERIES

Pallet Truck



CPFS-15S-107-A

- Capacity : 1500/2000 kg
- Fork (W) : 470/520/685 mm
- Fork (L) : 850/1070/1220 mm
- Min. (H) : 65/80 mm
- Max. (H) : 185/200 mm

Power Lifter



PL-H350-15SU

- Capacity : 350 kg
- Fork (W) : 530 mm
- Fork (L) : 650 mm
- Min. (H) : 80 mm
- Max. (H) : 1500 mm

Lift Table



LT-H250-8SU

- Capacity : 150/250/500 kg
- Table : (W)700 × (L)400/
(W)800 × (L)500/
(W)900 × (L)600
- Min. (H) : 210/245/330
- Max. (H) : 740/850/980

Santo Car



SC-2-12SU

- Capacity : 200 kg
- Table : (W)540 × (L)600 mm
- Min. (H) : 160 mm
- Max. (H) : 800/1,150 mm

Created by Highly Experienced Hydraulic Equipment Makers.

Originality Produces Know-how

O.P.K

OKUDAYA GIKEN CO., LTD.

285 Tanjo, Mihara-ku, Sakai-city,
Osaka 587-0011, JAPAN.
TEL 81-723-61-7861 FAX 81-723-62-2102

URL : <http://www.opk.co.jp>



* Products with special specifications besides those with standard specifications are manufactured as well. Feel free to contact OKUDAYA GIKEN.

The specifications described in this catalog are subject to change without notice for product improvement.

* The colors of actual products may be more or less different from those printed in this catalog.

All rights reserved.



As of December 2015